

AMP MULTI-POSITION SERIES

Oil-fired furnace

ECO-EFFICIENT

in a high-profile cabinet

Versatile • Efficient • Compact



FEATURES

- Quick connect burner
- Electronic control with cooling option
- Low speed manual blower switch
- Draft regulator
- 4 speed PSC motor
- Stainless steel heat exchanger
- **Beckett (NX or AFG) and Riello burner**

OPTIONAL

- Sealed combustion (Direct vent)
- Variable speed motor

Model	W x H x D (in)	Supply (in)	Return (in)	Flue pipe (in)	Weight (lbs / kg)
098	16 $\frac{7}{8}$ x 40 $\frac{3}{4}$ x 21 $\frac{1}{2}$	16 x 19	19 x 19	5	125 / 57
112	21 $\frac{3}{4}$ x 41 $\frac{1}{2}$ x 25 $\frac{3}{4}$	17 $\frac{3}{4}$ x 18 $\frac{3}{4}$	21 $\frac{3}{4}$ x 17 $\frac{3}{4}$	5	153 / 70
154	25 x 48 x 28 $\frac{1}{2}$	20 x 22	21 $\frac{3}{4}$ x 21 $\frac{3}{4}$	6	200 / 90




www.dettson.ca

AMP MULTI-POSITION SERIES

When every liter of heating oil counts!

While designing the AMP furnaces, our engineers optimized the stainless steel heat exchanger to allow selected high-efficiency oil burners to use less fuel while providing more heat.

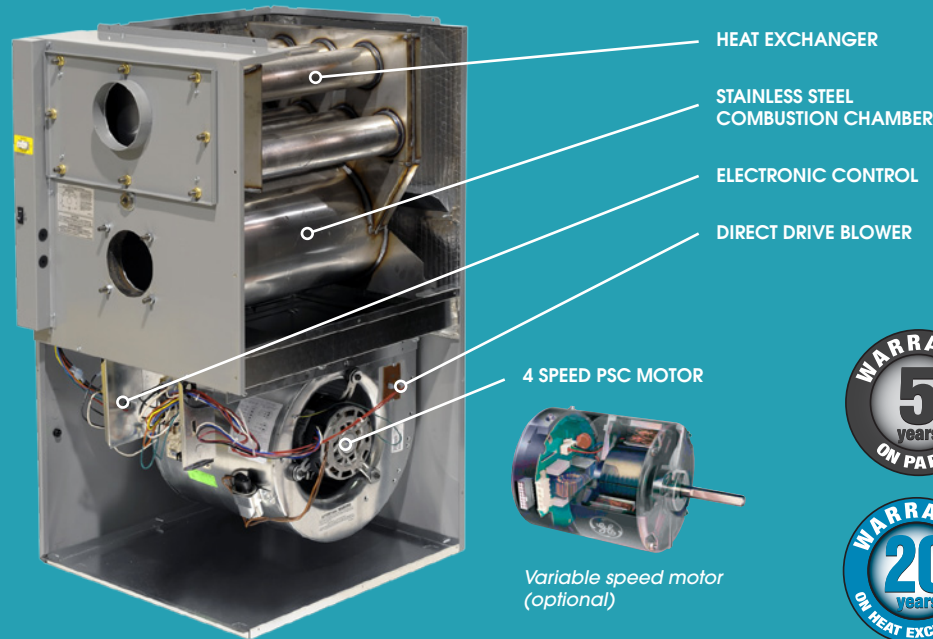

AVAILABLE BURNERS



NX Beckett Burner



Riello F-40 Burner



AFG Beckett burner



Features

One of the great features of the AMP oil furnace is its small footprint expanding installation possibilities. Twinned with its ability to vent combustion products through a sealed combustion system (optional) if natural venting through a chimney is not an option, you and your contractor can opt for the best configuration and space utilization.

Technical specifications

MODELS	AMP 098	AMP 112	AMP 154
Energy Star on Variable Speed models only: Requirements met by fan furnace efficiency			
Efficiency AFUE (CSA B212)	Up to 87.0%	Up to 87.1%	Up to 87.0%
Input (BTU/h)	77,000 – 84,000	95,200 – 112,000	126,000 – 154,000
Output (BTU/h)	59,200 – 70,400	81,200 – 94,200	107,000 – 129,000
Parts warranty	5 years	5 years	5 years
ECM variable speed	Optional	Optional	Optional
Beckett NX or AFG burner	•	•	•
Riello F-40 or BF-40 burner	•	•	•
Chimney vent	•	•	•
Direct vent (sealed combustion)	•	•	•
Profile / flue	Multi-position / front flue		

Heat exchanger warranties are 20 years decreasing from date of installation. Check individual listings. Restrictions apply. See warranty certificate for details.



3400, boulevard Industriel
Sherbrooke, Quebec J1L 1V8
Canada

www.dettson.ca

