

The Dettson logo features a stylized 'D' composed of three curved segments in green, red, and blue, followed by the word 'Dettson' in a bold, blue, sans-serif font.

Duotec

DUAL VOLTAGE AIR HANDLER



Voltage - 115 or 230 ⚡

**Compact system, secure and 100% efficient**


- Compatible with AC, heat pump up to 5 tons & several coil brands in the market
- Multiposition installations : Upflow, downflow, horizontal, left & right
- True ECM variable speed blower motor
- PSC engine still available for the Quebec market
- Direct-drive slide-out blower
- Adaptability to various scenarios
- Easy, fast and cheap installation
- Internal 1/2" insulation




# AIR HANDLER



A powerful air handler that is compatible with a wide variety of third party equipment

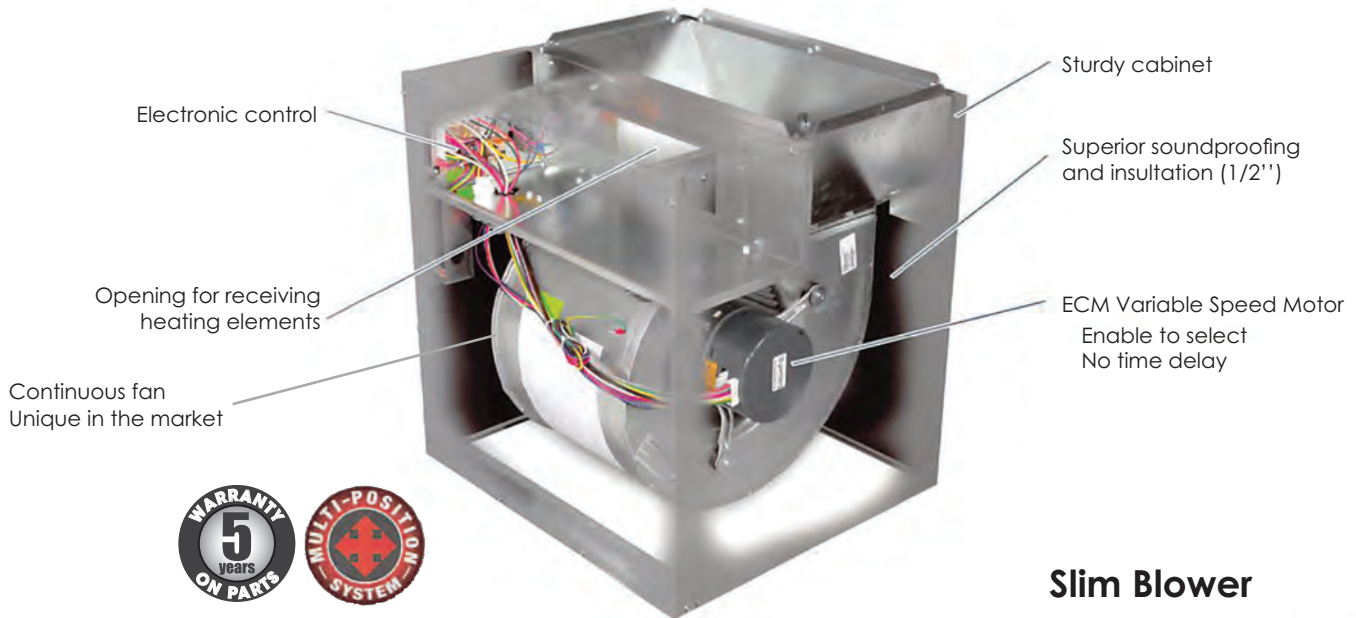

## Slim Blower

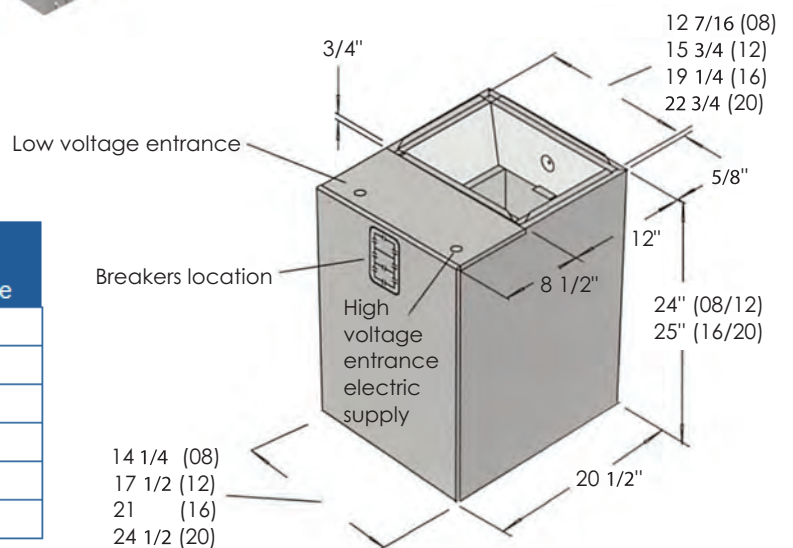

### Optional electric backup heat

	Heat Strip Staging	
	Single-Stage Operation	Two Stage Capable
5 kW	EHIA05KN	-
7 kW	EHIA07KN	-
10 kW	EHIA10KN	-
15 kW	EHIA15KB	EHIA15KB
20 kW	EHIA20KB	EHIA20KB
25 kW	EHIA25KB	EHIA25KB

Note: Code EHIA00KN10 is used when there is no electric heating (0 kW).

Models	AC or Heat Pump Capacity (Ton)	Width (in.)	Maximum Airflow (CFM)	Motor HP		Weight	
				ECM	lbs	kg	
AHV08	1 ½ - 2 - 2 ½ - 3	14 ¼	1200	½	58	26	
AHV12	2 - 2 ½ - 3 - 4	17 ½	1600	½	62	28	
AHV16	3 - 3 ½ - 4 - 5	21	2000	¾	75	34	
AHV20	3 - 3 ½ - 4 - 5	24 ½	2000	¾	79	36	



3400 Industrial Boulevard  
Sherbrooke, Quebec  
J1L 1V8

T 1.819.346.8493  
TF 1.800.567.2733  
sales@dettson.ca  
[www.dettson.com](http://www.dettson.com)

Specifications subject to change without notice.