




FREE MATCH ULTRA HEAT

Ductless MultiZone Heat Pump

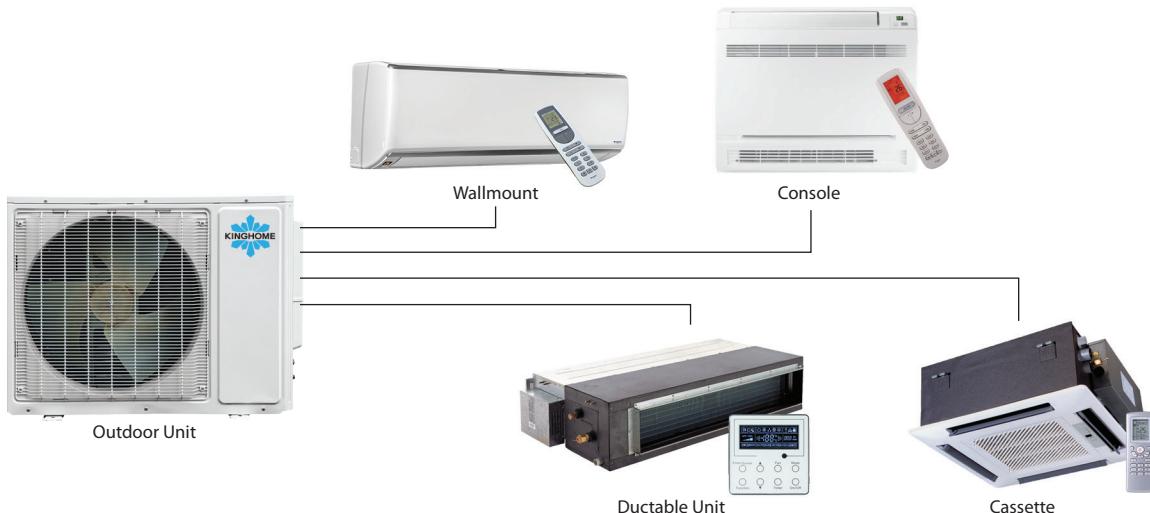

Performance up to



Up to

23 SEER
IN COOLING

10.5 HSPF
IN HEATING



AHRI CERTIFIED®
www.ahridirectory.org



R410A



Features

Operation mode

- Cooling, heating, dehumidifying, fan and auto.

Nominal capacity

- 18000, 22000, 36000, 42000 BTU/hr.

Voltage

- 230/208V, 60 Hz, 1-phase.

Outdoor unit

- Variable speed rotary compressor (INVERTER), with overload protection.
- Electronic expansion valve for precise control of refrigerant flow.
- Condenser fins covered with a hydrophilic coating for improved corrosion resistance.

- Large diameter quiet axial-flow fan for more efficient heat exchange.
- Smart pan heater to prevent ice formation.
- Compressor blanket and preheating technology.

Connection piping

- Minimum piping length of 10 ft. (3 m).
- Flared connections.

Application

- Dining room-kitchen, living room, family room, commercial building, office building, condo, restaurant.

Includes



Smart Pan Heater



Crankcase Heater



Fin Coating



Quiet Design



Smart Defrosting



Smart Preheating




Auto Restart



Auto-Clean



Self-Diagnosis



Sleep Mode




Turbo Mode



Up & Down Swing



Timer



Lock

FREE MATCH ULTRA HEAT

Outdoor Unit Models

Product #		KM18UH50	KM24UH50	KM36UH50	KM42UH50
Technical Performance					
Number of connectable indoor unit	-	1 to 2	2 to 3	2 to 4	2 to 5
Voltage	Volts	230/208	230/208	230/208	230/208
Cooling capacity	Nominal	W (BTU/hr)	5 300 (18 000)	6 450 (22 000)	10 550 (36 000)
	Min. – max.	W (BTU/hr)	2051 - 6155 (6 998 - 21 001)	2 198 - 9 672 (7 500 - 33 000)	2 600 - 12 500 (8 871 - 42 650)
Heating capacity	Nominal	W (BTU/hr)	6 150 (21 000)	7 650 (26 000)	10 550 (36 000)
	Min. – max.	W (BTU/hr)	2 052 - 7 600 (7 000 - 26 000)	2 198 - 9 100 (7 500 - 31 000)	2 600 - 12 460 (8 871 - 42 515)
Used cooling power input	Nominal	W	1450	1760	4020
Used heating power input	Nominal	W	1710	2090	3300
MCA	A	22	26	32	32
Max. over-current protection (MOCP)	A	35	40	60	60
SEER	-	23	23	23	23
HSPF	-	10.5	10.5	10	10
EER	W/W	12.5	12.5	9	9
COP	W/W	3.6	3.6	3.2	3.4
ENERGY STAR	-	✓	✓	-	-
Air flow volume	cfm	2530	2530	3060	3060
Sound level	dB (A)	58	60	62	62
Compressor power input	W	14.9	17	27	28.5
Fan motor power output	W	90	90	90	90
Refrigerant volume (R410A)	oz (g)	77.6 (2200)	95 (2700)	158 (4500)	176 (5000)
Dimension	L x H x D	po (mm)	39 1/2 x 31 1/8 x 16 7/8 (1000 x 790 x 427)	39 1/2 x 31 1/8 x 16 7/8 (1000 x 790 x 427)	42 7/8 x 43 7/16 x 17 5/16 (1087 x 1103 x 440)
Net weight	lb (kg)	171 (78)	171 (78)	282 (128)	282 (128)
Operating ambient temperature	Cooling	°C (°F)	-18 to 48 (0 to 118)		
	Heating	°C (°F)	-35 to 24 (-31 to 75.2)		
Connection Piping/Refrigerant					
Pre-charge length	ft. (m)	65.6 (20)	98.4 (30)	131 (40)	131 (40)
Additional refrigerant charge	oz/ft. (g/m)	0.2 (20)	0.2 (20)	0.2 (20)	0.2 (20)
Liquid pipe outer diameter	in.	1/4	1/4	1/4	1/4
Gas pipe outer diameter	in.	3/8	3/8	3/8	3/8
Max. height difference outdoor to indoor unit	ft. (m)	26.2 (8)	26.2 (8)	49.21 (15)	49.21 (15)
Max. height difference between indoor units	ft. (m)	26.2 (8)	26.2 (8)	49.21 (15)	49.21 (15)
Max. length outdoor to last indoor unit	ft. (m)	82 (25)	82 (25)	82 (25)	82 (25)
Max. total length	ft. (m)	164 (50)	229.7 (70)	246.1 (75)	262.5 (80)



Manufactured by
GREE

3400, boulevard Industriel
Sherbrooke, Québec
J1L 1V8 Canada

T 1.819.346.8493
TF 1.800.567.2733
F 1.819.822.4227
info@dettson.ca
www.dettson.com

FREE MATCH ULTRA HEAT

Indoor Unit Models

LOMO Wallmount

Product #			KW09HQ2B8DI	KW12HQ2B8DI	KW18HQ2B8DI	KW24HQ2B8DI
Cooling capacity	Nominal	W (BTU/hr)	2638 (9000)	3517 (12000)	5275 (18000)	6448 (22000)
Heating capacity	Nominal	W (BTU/hr)	3224 (11000)	3810 (13000)	5800 (19800)	6741 (23000)
Dehumidification		pt/hr (l/hr)	1.69 (0.80)	2.96 (1.40)	3.80 (1.80)	4.23 (2.00)
Air flow volume	Min. - max.	cfm	171 / 377	171 / 400	335 / 559	530 / 706
Sound level	Min. - max.	dB (A)	29 / 43	29 / 45	39 / 47	36 / 48
Dimension	L x H x D	in. (mm)	33 1/4 x 11 3/8 x 8 1/4 (845 x 289 x 209)	33 1/4 x 11 3/8 x 8 1/4 (845 x 289 x 209)	38 3/16 x 11 13/16 x 8 13/16 (970 x 300 x 224)	42 7/16 x 12 13/16 x 9 11/16 (1078 x 325 x 246)
Net Weight		lb (kg)	22 (10)	22 (10)	28 (13)	34 (15)
Liquid pipe outer diameter		in.	1/4	1/4	1/4	1/4
Gas pipe outer diameter		in.	3/8	1/2	5/8	5/8

Console

Product #			KM09HEDI	KM12HEDI
Cooling capacity	Nominal	W (BTU/hr)	2638 (9000)	3517 (12000)
Heating capacity	Nominal	W (BTU/hr)	2784 (9500)	3810 (13000)
Dehumidification		pt/hr (l/hr)	1.69 (0.80)	2.96 (1.40)
Air flow volume	Min. - max.	cfm	188 / 382	206 / 441
Sound level	Min. - max.	dB (A)	26 / 40	32 / 43
Dimension	L x H x D	in. (mm)	27 5/8 x 23 5/8 x 8 1/2 (701 x 599 x 216)	27 5/8 x 23 5/8 x 8 1/2 (701 x 599 x 216)
Net Weight		lb (kg)	33 (15)	33 (15)
Liquid pipe outer diameter		in.	1/4	1/4
Gas pipe outer diameter		in.	3/8	3/8

Ductable Unit

Product #			KM09HFDI	KM12HFDI	KM18HFDI	KM24HFDI
Cooling capacity	Nominal	W (BTU/hr)	2491 (8500)	3488 (11900)	4484 (15300)	6975 (23800)
Heating capacity	Nominal	W (BTU/hr)	2784 (9500)	3839 (13100)	5480 (18700)	8030 (27400)
Dehumidification		pt/hr (l/hr)	1.69 (0.80)	2.96 (1.40)	3.80 (1.80)	5.28 (2.50)
Air flow volume	Min. - max.	cfm	147 / 265	176 / 324	294 / 412	324 / 588
Sound level	Min. - max.	dB (A)	31 / 37	32 / 39	33 / 41	34 / 42
Dimension	L x H x D	in. (mm)	27 5/8 x 7 7/8 x 24 3/16 (701 x 201 x 615)	27 5/8 x 7 7/8 x 24 3/16 (701 x 201 x 615)	35 3/8 x 7 7/8 x 24 3/16 (899 x 201 x 615)	43 5/16 x 7 7/8 x 24 3/16 (1100 x 201 x 615)
Net Weight		lb (kg)	49 (22)	51 (23)	60 (27)	68 (31)
Liquid pipe outer diameter		in.	1/4	1/4	1/4	3/8
Gas pipe outer diameter		in.	3/8	3/8	1/2	5/8

Cassette

Product #			KM12HKDI	KM18HKDI	KM24HKDI
Cooling capacity	Nominal	W (BTU/hr)	3500 (12000)	4200 (14400)	6682 (22800)
Heating capacity	Nominal	W (BTU/hr)	3800 (13000)	4700 (16000)	8030 (27400)
Dehumidification		pt/hr (l/hr)	2.96 (1.40)	3.80 (1.80)	5.28 (2.50)
Air flow volume	Min. - max.	cfm	265 / 382	265 / 417	518 / 753
Sound level	Min. - max.	dB (A)	34 / 44	35 / 47	36 / 47
Unit Dimension	L x H x D	in. (mm)	23 1/2 x 9 1/2 x 23 1/2 (596 x 240 x 596)	23 1/2 x 9 1/2 x 23 1/2 (596 x 240 x 596)	33 1/8 x 9 1/2 x 33 1/8 (840 x 240 x 840)
Grille Dimension	L x H x D	in. (mm)	26 3/8 x 1 7/8 x 26 3/8 (670 x 50 x 670)	26 3/8 x 1 7/8 x 26 3/8 (670 x 50 x 670)	37 3/8 x 2 5/16 x 37 3/8 (950 x 60 x 950)
Net Weight		lb (kg)	44 (20)	44 (20)	57 (26)
Liquid pipe outer diameter		in.	1/4	1/4	3/8
Gas pipe outer diameter		in.	3/8	1/2	5/8

Note that each unit is individually packaged.



Manufactured by
GREE

3400, boulevard Industriel
Sherbrooke, Québec
J1L 1V8 Canada

T 1.819.346.8493
TF 1.800.567.2733
F 1.819.822.4227
info@detson.ca
www.detson.com

FREE MATCH ULTRA HEAT

To order

1 Choose the outdoor unit based on the system capacity required.

2 Choose the appropriate indoor unit combination by referring to the combination table below.

Refer to the legend to find the product # of the indoor units you want to order.

Note that each unit is individually packaged.

Example:

Outdoor unit required:
KM24UH5O

Indoor unit combination chosen:
09 + 09 + 12 + 12 + 18

Outdoor Unit



KM24UH5O



Indoor Unit

KW09HQ2B8DI



KM09HEDI



KM09HFDI



KM12HKDI



Combination Table

Outdoor Unit	2 Indoor Units
	09 + 09
KM18UH5O	09 + 12
	12 + 12

Outdoor Unit	2 Indoor Units	3 Indoor Units
	09 + 09	09 + 09 + 09
KM24UH5O	09 + 12	09 + 09 + 12
	09 + 18	09 + 09 + 18
	12 + 12	09 + 12 + 12
	12 + 18	09 + 12 + 18
	18 + 18	-

Outdoor Unit	2 Indoor Units	3 Indoor Units	4 Indoor Units
	09 + 09	09 + 09 + 09	09 + 09 + 09 + 09
KM36UH5O	09 + 12	09 + 09 + 12	09 + 09 + 09 + 12
	09 + 18	09 + 09 + 18	09 + 09 + 09 + 18
	09 + 24	09 + 09 + 24	09 + 09 + 09 + 24
	12 + 12	09 + 12 + 12	09 + 09 + 12 + 12
	12 + 18	09 + 12 + 18	09 + 09 + 12 + 18
	12 + 24	09 + 12 + 24	09 + 09 + 12 + 24
	18 + 18	09 + 18 + 18	09 + 09 + 18 + 18
	18 + 24	09 + 18 + 24	09 + 12 + 12 + 12
	24 + 24	12 + 12 + 12	09 + 12 + 12 + 18
	-	12 + 12 + 18	12 + 12 + 12 + 12
	-	12 + 12 + 24	12 + 12 + 12 + 18
	-	12 + 18 + 18	-
	-	12 + 18 + 24	-
	-	18 + 18 + 18	-

Outdoor Unit	2 Indoor Units	3 Indoor Units	4 Indoor Units	5 Indoor Units
	09 + 09	09 + 09 + 09	09 + 09 + 09 + 09	09 + 09 + 09 + 09 + 09
KM42UH5O	09 + 12	09 + 09 + 12	09 + 09 + 09 + 12	09 + 09 + 09 + 09 + 12
	09 + 18	09 + 09 + 18	09 + 09 + 09 + 18	09 + 09 + 09 + 09 + 18
	09 + 24	09 + 09 + 24	09 + 09 + 09 + 24	09 + 09 + 09 + 09 + 24
	12 + 12	09 + 12 + 12	09 + 09 + 12 + 12	09 + 09 + 09 + 12 + 12
	12 + 18	09 + 12 + 18	09 + 09 + 12 + 18	09 + 09 + 09 + 12 + 18
	12 + 24	09 + 12 + 24	09 + 09 + 12 + 24	09 + 09 + 09 + 18 + 18
	18 + 18	09 + 18 + 18	09 + 09 + 18 + 18	09 + 09 + 12 + 12 + 12
	18 + 24	09 + 18 + 24	09 + 09 + 18 + 24	09 + 09 + 12 + 12 + 18
	24 + 24	09 + 24 + 24	09 + 12 + 12 + 12	09 + 12 + 12 + 12 + 12
	-	12 + 12 + 12	09 + 12 + 12 + 18	09 + 12 + 12 + 12 + 18
	-	12 + 12 + 18	09 + 12 + 12 + 24	12 + 12 + 12 + 12 + 12
	-	12 + 12 + 24	09 + 12 + 18 + 18	-
	-	12 + 18 + 18	09 + 12 + 18 + 24	-
	-	12 + 18 + 24	09 + 18 + 18 + 18	-
	-	12 + 24 + 24	12 + 12 + 12 + 12	-
	-	18 + 18 + 18	12 + 12 + 12 + 18	-
	-	18 + 18 + 24	12 + 12 + 12 + 24	-
	-	-	12 + 12 + 18 + 18	-

Legend

Code	BTU/hr
09	9000 BTU/hr
12	12000 BTU/hr
18	18000 BTU/hr
24	24000 BTU/hr



Manufactured by
GREE

3400, boulevard Industriel
Sherbrooke, Québec
J1L 1V8 Canada

T 1.819.346.8493
TF 1.800.567.2733
F 1.819.822.4227
info@detson.ca
www.detson.com