

## Strata DNSALE150

### ERV - Energy Recovery Air Exchanger

Side Port Model



Top Port Model



CSA-C439-18

#### Air flow and performance

#### Voltage Benefit

#### Construction

#### Motor

#### Energy recovery core

### Features

- Fully adjustable air flow (150 cfm @ 0 in.w.g.).
- 63% sensible recovery effectiveness at 0 °C (32 °F) 30 L/s.
- 120V, 60Hz, 1A.
- Reduce heating demand in winter and cooling demand in summer.
- Whisper-quiet: factory calibrated and balanced.
- Easy installation and maintenance.
- Designed and manufactured in Canada to operate in variable climatic conditions.
- Door and housing in corrosion-resistant galvanized steel, 24-gauge, pre-painted neutral white.
- Convenient, screwless hinged door.
- Ultra-thin: 9 in. (229 mm).
- No drain required.
- Lightweight for ease of installation: 33 lb (15 kg).
- Port size: 5 in. (127 mm).
- Two configurations to optimize your space: Side Port or Top Port models.
- Reverse air flow configuration available as a factory installed option (-R). For further explanation, please refer to the document Normal and Reverse.
- Foam for ceiling installation for *Top Port models only*, available as a factory installed option (-F).
- Backdraft damper required on fresh air inlet (not supplied).
- Energy-efficient, sealed European motor with closed housing and automatic reset thermal protection.
- Balancing without flow keys. 100% electronic adjustment. Pressure ports integrated into the door for precise, easy balancing.
- High-efficiency 100% polymer core, extremely durable.
- Recovers both latent and sensible energy. (Heat and Humidity).
- Meets or exceeds ASHRAE 90.1-2010.
- Washable in soapy water to recover its full effectiveness without deterioration or contamination.
- Antimicrobial protection - ISO846.

## Control/timer\*

- 2 control choices available:
  - Optional Decora-style wall-mounted control/timer (SA-LT15).  
INTERMITTENT (20-40) – CONTINUOUS – OFF – Timer (20-40-60 minutes).
  - Optional digital Decora-style wall-mounted control/timer (SA-LCD15).  
INTERMITTENT (20-40) – CONTINUOUS – Humidity – Recirculation – OFF.

## Installation

- Furnace interconnect plug connector factory installed.
- Can be ceiling-mounted or suspended.
- Easily installed in the ceiling void or just below the fire-rated ceiling.
- Set of nylon suspension straps included for installation.

## Setting

- Steel mounting plate for Foam Top Port models only, available as an option (SA-P5R).
- Balance the unit using the supplied instruction named: Balancing.
- All the installer needs are the required flow rates, a manometer, and 5 minutes to adjust and balance the system.
- Simply specify the air flow rates for LOW SPEED and HIGH SPEED.
- The static pressure of the system should ideally be less than or equal to the static pressure indicated by the graph for HIGH SPEED.
- You don't have to worry about static pressure to limit air flow or adding flow keys as other devices. All you must do is provide ducting that doesn't limit maximum flow, and the unit's adjustments will allow you to fine-tune flow rates.


## Warranty Application

- **Motor 5-year. Other parts except filters and pre-filters 1-year.**
- The ideal solution for high-rise apartments and small to medium-size homes, when regulations do not require unit certification at -25°C (-13 °F).
- Purifies the air by expelling many pollutants, dust, and allergens to the outside, while ensuring an equivalent supply of fresh air in the home.


### \* Important note :

No controls are included with the purchase of an air exchanger.  
SA-LT15 and SA-LCD15 controls must be purchased separately.


## Side Port Model - DNSALE150-S

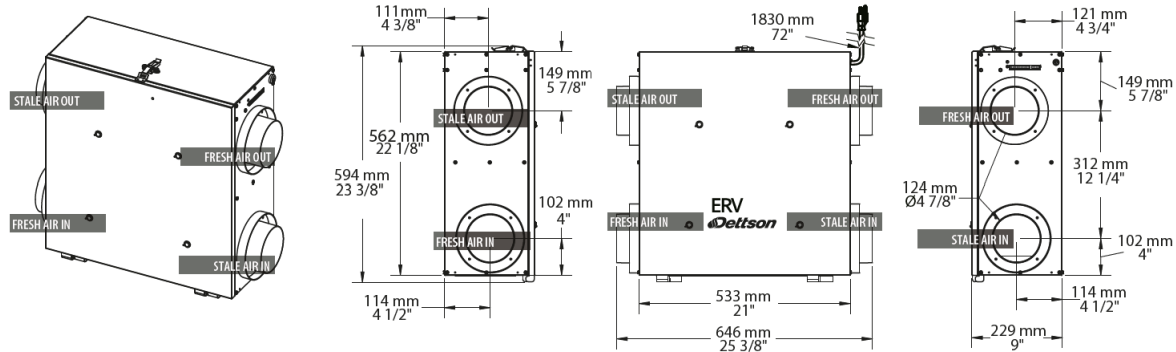

## Top Port Model - DNSALE150-T

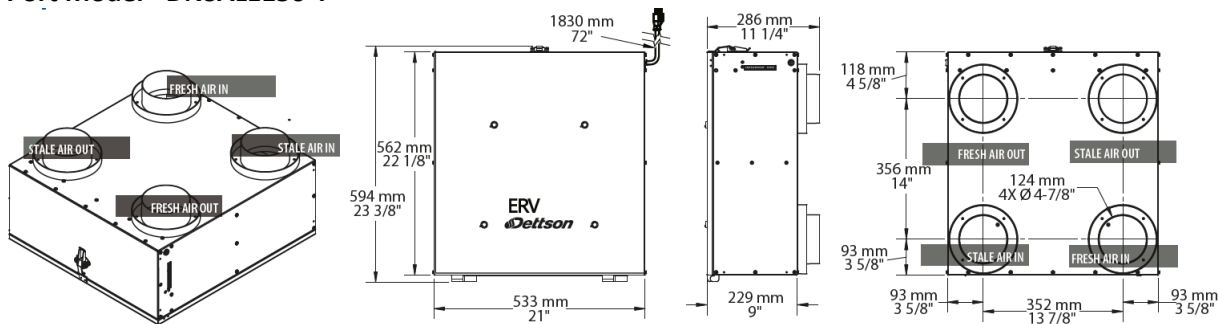

## ERV DNSALE150 - Curves at highest speed

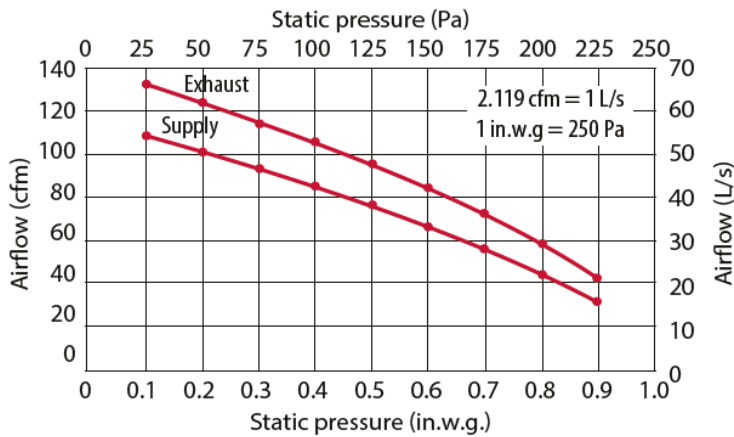

## Energy ratings - HVI certified

Supply temperature		Air flow		Power	Sensible recovery (SRE) <sup>1</sup>	Adjusted Sensible Recovery	Latent recovery / moisture transfer
°C	°F	cfm	L/s	W	%	%	%
<b>Heating</b>							
0	32	53	25	54	60	67	51
0	32	64	30	62	63	69	49
0	32	104	49	96	59	64	40
<b>Cooling</b>							
					Total recovery efficiency	Adjusted total recovery efficiency	
35	95	53	25	57	49	53	53

## Models

Product #	cfm	Recirculation	SRE <sup>1</sup> 0 ° C (32 °F) 30 L/s	SRE <sup>1</sup> -25 °C (-13 °F) 24 L/s	Port in.	mm	Volts	Hertz	Amp.	Weight lb	kg
<b>ERV Energy recovery air exchanger 150 cfm (Side Port)</b>											
DNSALE150S	150	No	63%	No	5	127	120	60	1	33	15
<b>ERV Energy recovery air exchanger 150 cfm (Top Port)</b>											
DNSALE150T	150	No	63%	No	5	127	120	60	1	33	15
DNSALE150TF	150	No	63%	No	5	127	120	60	1	33	15

<sup>1</sup> SRE: Sensible Recovery Effectiveness.

## Options

Product # Kit	Product # Factory installed	Description	Qty
-	F	Foam for ceiling installation for Top Port models only	
-	R	Reverse air flow	
SA-P5R	-	Steel mounting plate for Top Port model only with foam (F)	
KIT-SA-FI-115	-	Kit of 2 filters for 115R air exchanger	

## Controls

Product #	Description	Qty
SA-LCD15 <sup>2</sup>	Digital Decora-style wall-mounted control/timer for residential air exchangers	
SA-LT15 <sup>2</sup>	Decora wall-mounted control/timer for residential air exchangers	

<sup>2</sup> Must be purchased separately.

## Others

Type	Quantity	Model and description Complementary informations	Volts	Phase	Watts	Length mm/in.	Informations Color/installation

## Specifications may change without prior notice

Project:	Approval Information
Consultant Engineer:	
Electrical Contractor:	
Distributor:	
Date:	
Contact at manufacturer:	