



# LOMO PLUS ULTRA HEAT

Ductless Single Zone Heat Pump



Indoor Unit




Outdoor Unit

Performance up to



Up to



## Features

### Operation mode

- Cooling, heating, dehumidifying, fan and auto.

### Nominal capacity

- 9000, 12000, 18000, 24000 BTU/hr.

### Voltage

- 230/208V, 60 Hz, 1-phase.

### Indoor unit

- High wall installation, dual side connection.
- Plastic housing, standard white.
- 7-speed cross-flow fan (turbo, high, medium-high, medium, medium-low, low and quiet).
- Washable filters.

### Outdoor unit

- Variable speed rotary compressor (INVERTER), with overload protection.
- Electronic expansion valve for precise control of refrigerant flow.
- Condenser fins covered with a hydrophilic coating for improved corrosion resistance.

- Large diameter quiet axial-flow fan for more efficient heat exchange.
- Smart pan heater to prevent ice formation.
- Compressor blanket and preheating technology.

### Connection piping

- Minimum piping length of 10 ft. (3 m).
- Flared connections.


### Control

- Wireless remote included.
- Wired wall controller available.
- Wi-Fi capability.
- Set temperature: 16 to 30 °C (61 to 86 °F).
- Temperature display format: °C or °F.


### Application

- Dining room-kitchen, living room, family room, commercial building, office building, condo, restaurant.

Indoor Unit

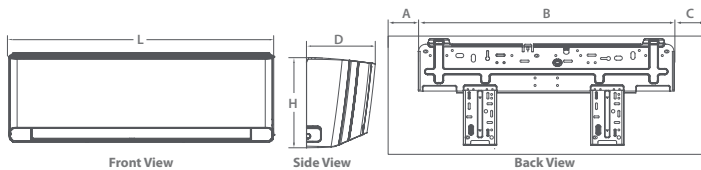

Outdoor Unit

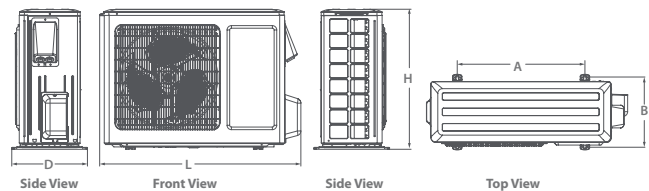

Indoor Unit	L		H		D		A		B		C	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
KW09HQ3D6D/O KW12HQ3D6D/O	39 3/16	970	11 7/8	302	8 7/8	225	4 5/8	117	27	685	7 5/8	194
KW18HQ3D6D/O KW24HQ3D6D/O	43 3/8	1078	12 7/8	325	9 13/16	246	8 9/16	217	26 15/16	684	7 7/8	199

Outdoor Unit	L		H		D		A		B	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
KW09HQ3D6D/O KW12HQ3D6D/O	35 3/8	899	23 1/2	596	14 7/8	378	21 2/3	550	13 1/2	343
KW18HQ3D6D/O KW24HQ3D6D/O	38 5/8	1000	31 1/8	790	16 13/16	427	24	610	15 9/16	395

# LOMO PLUS ULTRA HEAT

## Includes



Smart Pan Heater



Crankcase Heater



Fin Coating



Quiet Design



Smart Defrosting



Smart Preheating



Auto Restart



Auto-Clean



Self-Diagnosis



Sleep Mode



Turbo Mode



Up & Down Swing



Left & Right Swing



Timer



I Feel



Lock



Wireless Remote



Wi-Fi

## Optional



Wall Controller

## Models

Product # <sup>1</sup>	Indoor Unit Outdoor Unit		KW09HQ3D6D/O KW09HQ3D6D/I	KW12HQ3D6D/O KW12HQ3D6D/I	KW18HQ3D6D/O KW18HQ3D6D/I	KW24HQ3D6D/O KW24HQ3D6D/I
<b>Technical Performance</b>						
<b>Voltage</b>		<b>Volts</b>	230/208	230/208	230/208	230/208
	Nominal	<b>W (BTU/hr)</b>	2638 (9000)	3517 (12000)	5276 (18000)	6450 (22000)
<b>Cooling capacity</b>	Min. - max.	<b>W (BTU/hr)</b>	450 - 3800 (1535 - 12996)	850 - 4500 (2900 - 15354)	1200 - 6400 (4094 - 21837)	2000 - 9000 (6800 - 30700)
	Nominal	<b>W (BTU/hr)</b>	2638 (9000)	3575 (12200)	5276 (18000)	7000 (24000)
<b>Heating capacity</b>	Min. - max.	<b>W (BTU/hr)</b>	700 - 4000 (2388 - 13648)	900 - 5500 (3071 - 18766)	1200 - 7200 (4094 - 24566)	2000 - 9500 (6800 - 32000)
	Nominal	<b>W</b>	540	785	1330	1700
<b>Used cooling power input</b>	Min. - max.	<b>W</b>	50 - 1400	75 - 1500	350 - 2500	450 - 3700
	Nominal	<b>W</b>	590	940	1500	2000
<b>Used heating power input</b>	Min. - max.	<b>W</b>	200-1500	250 - 1600	350 - 2500	380 - 3700
	Nominal	<b>W</b>	1500	1600	2500	3700
<b>Rated current</b>		<b>A</b>	6.2	6.5	10.8	16.4
<b>MCA</b>		<b>A</b>	9	9	22	22
<b>Max. over-current protection (MOCP)</b>		<b>A</b>	15	15	30	35
<b>SEER</b>		-	38.0	30.5	24.5	21.5
<b>HSPF</b>		-	15.0	14.0	12.0	12
<b>EER</b>		(BTU/hr/W)	16.5	15.3	13.5	13
<b>COP</b>		W/W	4.47	3.80	3.52	3.50
<b>ENERGY STAR</b>		-	✓	✓	✓	✓
<b>Indoor Unit</b>						
<b>Dehumidification</b>		pt/hr (l/hr)	1.69 (0.80)	2.96 (1.40)	3.80 (1.80)	5.20 (2.50)
<b>Air flow volume</b>	T / H / MH / M / ML / L / Q <sup>2</sup>	cfm	424 / 383 / 353 / 324 / 294 / 265 / 206	500 / 471 / 411 353 / 324 / 265 / 235	736 / 677 / 618 / 559 / 500 / 457 / 353	824 / 765 / 706 / 647 / 589 / 500 / 383
	T / H / MH / M / ML / L / Q <sup>2</sup>	dB (A)	43 / 40 / 38 / 36 / 33 / 31 / 19	49 / 46 / 43 / 40 / 37 / 34 / 22	51 / 48 / 45 / 42 / 39 / 36 / 34	52 / 48 / 46 / 43 / 40 / 37 / 34
<b>Fan motor power output</b>		<b>W</b>	60	60	60	70
<b>Fan motor RLA</b>		<b>A</b>	0.09	0.09	0.24	0.38
<b>Deflector stepper motor power output</b>		<b>W</b>	2.5 / 1.5	2.5 / 1.5	2.5 / 1.5	2.5
<b>Net weight</b>		lb (kg)	29.8 (13.5)	29.8 (13.5)	36.4 (16.5)	36.4 (16.5)
<b>Outdoor Unit</b>						
<b>Air flow volume</b>		cfm	2400	2400	2354	4000
<b>Sound level</b>		dB (A)	53	53	59	59
<b>Compressor power input</b>		<b>W</b>	1070	1070	2443	2443
<b>Compressor LRA</b>		<b>A</b>	35	35	30	30
<b>Compressor RLA</b>		<b>A</b>	6.9	6.9	15.5	16
<b>Fan motor power output</b>		<b>W</b>	30	30	90	90
<b>Fan motor RLA</b>		<b>A</b>	0.24	0.24	0.65	0.65
<b>Refrigerant volume (R410A)</b>		oz (g)	45.9 (1301)	49.4 (1400)	70.6 (2101)	81.1 (2299)
<b>Net weight</b>		lb (kg)	99.2 (45)	99.2 (45)	141.1 (64)	147.7 (67)
	Operating ambient temperature	Cooling Heating	°C (°F)		-18 to 54 (0 to 129) -30 to 24 (-22 to 75)	
<b>Connection Piping/Refrigerant</b>						
<b>Pre-charge length</b>		ft. (m)	25 (7.5)	25 (7.5)	25 (7.5)	25 (7.5)
<b>Additional refrigerant charge</b>		oz/ft. (g/m)	0.2 (20)	0.2 (20)	0.5 (50)	0.5 (50)
<b>Liquid pipe outer diameter</b>		in.	1/4	1/4	1/4	1/4
<b>Gas pipe outer diameter</b>		in.	1/2	1/2	5/8	5/8
<b>Maximum height difference</b>		ft. (m)	49 (15)	49 (15)	66 (20)	98 (30)
<b>Maximum total length</b>		ft. (m)	98 (30)	98 (30)	98 (30)	164 (50)

<sup>1</sup> 1 indoor unit and 1 outdoor unit. Note that each unit is individually packaged.

<sup>2</sup> Cross-Flow Fan Speeds: (T) Turbo / (H) High / (MH) Medium-High / (M) Medium / (ML) Medium-Low / (L) Low / (Q) Quiet.



Manufactured by  
**GREE**

3400, boulevard Industriel  
Sherbrooke, Québec  
J1L 1V8 Canada

**T** 1.819.346.8493  
**TF** 1.800.567.2733  
**F** 1.819.822.4227  
info@dettson.ca  
**www.dettson.com**