

# AMT CLASSIC SERIES

## Oil-fired furnace

ECO-EFFICIENT

in a low-profile cabinet

Versatile • Powerful • Compact

MADE IN  
CANADA



### FEATURES

- Quick connect burner
- Electronic control with cooling option
- Low speed manual blower switch
- Draft regulator
- 4 speed PSC motor
- Stainless steel heat exchanger
- **Beckett (NX or AFG) and Riello burner**

### OPTIONAL

- Sealed combustion (Direct vent)
- Variable speed motor

Model	W x H x D (in)	Supply (in)	Return (in)	Flue pipe (in)	Weight (lbs / kg)
098	21 x 34 x 45	19 <sup>5</sup> / <sub>8</sub> x 19 <sup>3</sup> / <sub>4</sub>	17 <sup>7</sup> / <sub>8</sub> x 19 <sup>5</sup> / <sub>8</sub>	5	175 / 80
112	21 x 33 <sup>3</sup> / <sub>4</sub> x 48	19 <sup>5</sup> / <sub>8</sub> x 19 <sup>3</sup> / <sub>4</sub>	19 <sup>5</sup> / <sub>8</sub> x 19 <sup>3</sup> / <sub>4</sub>	5	195 / 89
154	24 <sup>7</sup> / <sub>8</sub> x 39 <sup>1</sup> / <sub>4</sub> x 52	23 <sup>3</sup> / <sub>4</sub> x 23 <sup>3</sup> / <sub>4</sub>	23 <sup>3</sup> / <sub>4</sub> x 19 <sup>3</sup> / <sub>4</sub>	6	270 / 122.5




www.deltson.ca

# AMT CLASSIC

SERIES

## When every liter of heating oil counts!

While designing the AMT furnaces, our engineers optimized the stainless steel heat exchanger to allow selected high-efficiency oil burners to use less fuel while providing more heat.

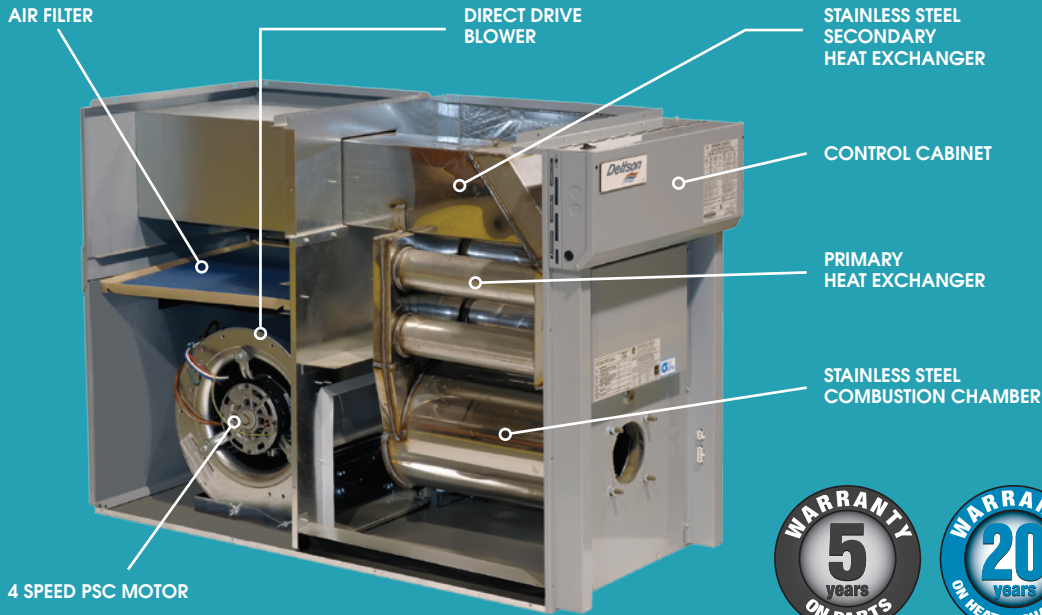

### AVAILABLE BURNERS



NX Beckett Burner




Riello F-40 Burner



AFG Beckett burner



Variable speed motor (optional)



## Features

One of the great features of the AMT oil furnace is its small footprint expanding installation possibilities. Twinned with its ability to vent combustion products through a sealed combustion system (optional) if natural venting through a chimney is not an option, you and your contractor can opt for the best configuration and space utilization.

## Technical specifications

MODELS	AMT 098	AMT 112	AMT 154
Energy Star on Variable Speed models only: Requirements met by fan furnace efficiency			
Efficiency AFUE (CSA B212)	Up to 87.9%	Up to 88.1%	Up to 87.7%
Input (BTU/h)	77,000 – 98,000	95,200 – 112,000	126,000 – 154,000
Output (BTU/h)	66,000 – 82,000	81,100 – 94,100	107,700 – 129,700
Parts warranty	5 years	5 years	5 years
ECM variable speed	Optional	Optional	Optional
Beckett NX or AFG burner	•	•	•
Riello F-40 or BF-40 burner	•	•	•
Chimney vent	•	•	•
Direct vent (sealed combustion)	•	•	•
Profile / flue	Low-Boy / rear flue		

Heat exchanger warranties are 20 years decreasing from date of installation. Check individual listings. Restrictions apply. See warranty certificate for details.



3400, boulevard Industriel  
Sherbrooke, Quebec J1L 1V8  
Canada

www.dettson.ca

